


UB2519 3V Battery

Type BA-5367/U: NSN-6135-01-507-1135

Alternative for

BA-5567/U: NSN-6135-01-090-5365

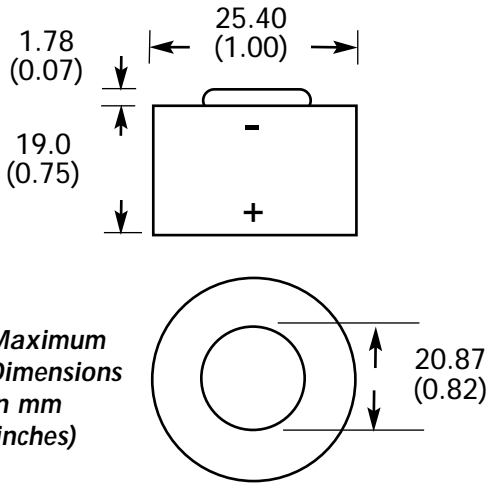

System: Non-Rechargeable
Lithium/Manganese Dioxide Battery

Part No: UB0006

Nominal Voltage: 3 Volts

Capacity (C): 1.3 AHrs @ 50 mA to 2V @ 23°C

Max. Discharge: 380 mA Continuous

Weight: 22 grams max.

Oper. Temp. Range: -30° to 72°C

Storage Temp. Range: -40° to 95°C

Volume: 9.6 cm³




Terminals: Nickel Plated Contacts

Housing: Plastic Housing

Transportation: Exceeded From Regulations

For a complete description of transportation regulations and definitions of the transportation classifications "Excepted" and Class 9," refer to Ultralife's web site at:

http://www.ulbi.com/whitepapers/Ultralife_Batteries_Lithium_Battery_Transportation_Regulations.pdf

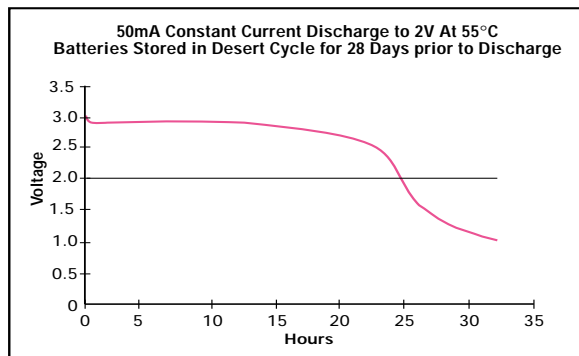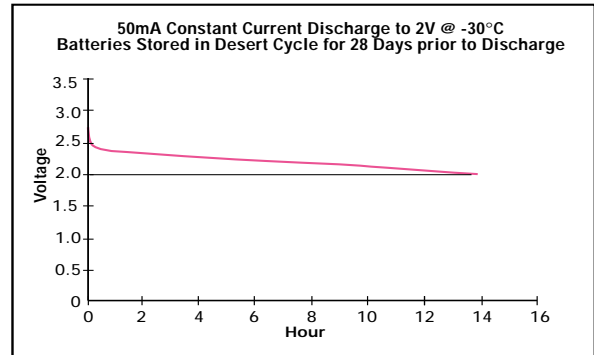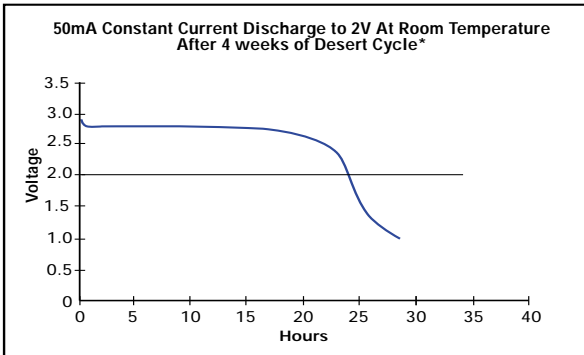

* Desert Cycle: 24 hour cycle between 35°C and 71°C